
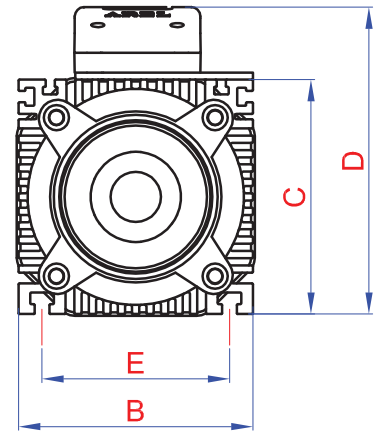
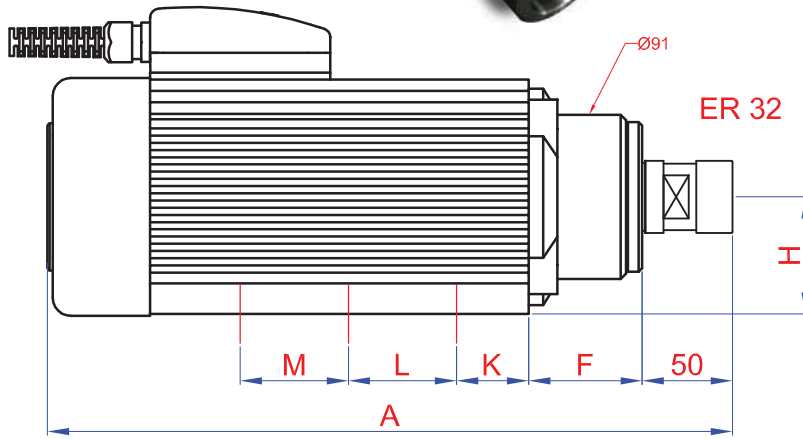


## ➤ ARFM.4K MOTORLAR / SPINDLES

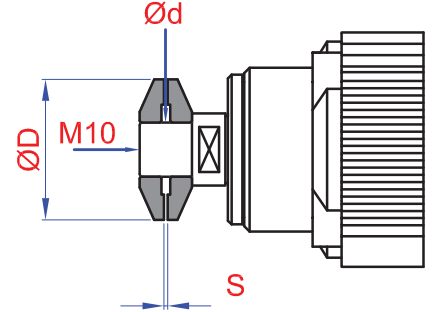

| TİP / TYPE | A<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | F<br>mm | H<br>mm | K<br>mm             | L<br>mm | M<br>mm | Ø D<br>mm | Ø d<br>mm | S<br>mm |
|------------|---------|---------|---------|---------|---------|---------|---------|---------------------|---------|---------|-----------|-----------|---------|
| ARFM.4K-S  | 330     | 130     | 130     | 170     | 104     | 63      | 65      | M6 T KANAL / T SLOT | 78      | 30      | 2         |           |         |
| ARFM.4K-M  | 380     | 130     | 130     | 170     | 104     | 63      | 65      | M6 T KANAL / T SLOT | 78      | 30      | 2         |           |         |
| ARFM.4K-L  | 420     | 130     | 130     | 170     | 104     | 63      | 65      | M6 T KANAL / T SLOT | 78      | 30      | 2         |           |         |

| TİP / TYPE | KW / HP   | Rpm    | Hz. | Volt        | Amper       | Kg.  | PENS / COLLETS                               |
|------------|-----------|--------|-----|-------------|-------------|------|----------------------------------------------|
| ARFM.4K-S1 | 2 / 2,65  | 6.000  | 200 | Δ 220-380 Y | 7 / 4       | 13,5 | ER 32<br>1 - 20 mm<br><br>ER 40<br>2 - 26 mm |
| ARFM.4K-S2 | 3 / 4     | 12.000 | 200 | Δ 220-380 Y | 10,4 / 6    | 13,5 |                                              |
| ARFM.4K-S3 | 4 / 5,5   | 18.000 | 300 | Δ 220-380 Y | 14 / 8,2    | 13,5 |                                              |
| ARFM.4K-S4 | 1,1 / 1,5 | 3.000  | 50  | Δ 220-380 Y | 3,8 / 2,2   | 13,5 |                                              |
| ARFM.4K-M1 | 3 / 4     | 6.000  | 200 | Δ 220-380 Y | 10,4 / 6    | 17,5 |                                              |
| ARFM.4K-M2 | 4 / 5,5   | 12.000 | 200 | Δ 220-380 Y | 14 / 8,2    | 17,5 |                                              |
| ARFM.4K-M3 | 5,5 / 7,5 | 18.000 | 300 | Δ 220-380 Y | 21 / 12     | 17,5 |                                              |
| ARFM.4K-M4 | 1,5 / 2   | 3.000  | 50  | Δ 220-380 Y | 6 / 3,5     | 17,5 |                                              |
| ARFM.4K-L1 | 4 / 5,5   | 6.000  | 200 | Δ 220-380 Y | 14 / 8,2    | 21,5 |                                              |
| ARFM.4K-L2 | 5,5 / 7,5 | 12.000 | 400 | 380 Δ       | 12          | 21,5 |                                              |
| ARFM.4K-L3 | 7,5 / 10  | 18.000 | 300 | Δ 220-380 Y | 26,5 / 15,5 | 21,5 |                                              |
| ARFM.4K-L4 | 2,2 / 3   | 3.000  | 50  | Δ 220-380 Y | 7,80 / 4,50 | 21,5 |                                              |